

## **Developing an Enhanced Thermoelectric Energy Harvesting Approach from Asphalt Pavement**

*Seyed Amid Tahami, Samer Dessouky, A. T. Papagiannakis*

*University of Texas at San Antonio*

### Abstract

The importance of green technologies for generating renewable energy and sustainable development is widely accepted. Highway pavements which are exposed to solar radiation, absorb a large amount of heat that could be harvested. This study aims to design an innovative thermoelectric generator system that utilizes the thermal gradients between the pavement surface and the soil below the pavement and converts it to electricity. This system consists of a heat collector, a thermal electric generator (TEG) and a coolant module. A prototype was fabricated to embed directly into asphalt pavements. Several simulations using finite element (FE) analyses were conducted to evaluate the performance of the system components and determine their optimal design. The final design was also tested in the field. Based on the experimental and FE results, the efficiency of the system was enhanced by improving its coolant module by incorporating a phase-changing heat sink. The optimized prototype was able to generate an average of 29 mWatts of electricity for South Texas conditions, which appears to be a promising independent source of power for road-side wireless sensors and near-field data communications. Keywords: Thermoelectric, energy harvesting, asphalt pavement, finite element, phase change material.

## INTRODUCTION

Energy harvesting stands alone as one of the most promising approaches to mitigate the fossil fuel depletion and environmental degradation. Energy harvesting is a process that captures unused ambient energy that would otherwise be lost as heat, light, sound, vibration, stress or movement. Solar energy is undoubtedly recognized as the unlimited and environment friendly energy resource. Recently, pavement infrastructures have drawn attention to be used as a renewable source for energy harvesting purposes. Solar radiation can be absorbed by asphalt pavement causing an increase in the temperature of asphalt pavements. Roadways are widely used in the transportation sector to connect communities and moving people and goods around the world. Pavements have been built over billions of kilometers long worldwide, among which over 6 million kilometers are allotted to the United States (1, 2).

Solar radiation absorbed by pavement surface causes temperature increase within pavement. Thermoelectric generators (TEGs) are ideal candidates for harvesting energy in asphalt pavement roadways as they convert thermal energy into electrical power. TEG can convert heat into electrical energy based on the Seebeck effect. Using TEGs offer several benefits such as environmentally friendly energy, no moving mechanical components and low maintenance requirements (3).

In the research carried out by Wu et al., the application of TEGs for production of electrical energy in pavement was investigated. They showed that to generate electricity the temperature difference between the pavement surface and the surrounding soil (deep inside the ground) can be utilized. In this study one side of the TEG device was attached directly to asphalt mix and another was attached to plate embedded in the soil. However, using such an approach might compromise their longevity due to the immediate exposure of TEGs to the cyclic mechanic (4).

Researchers at University of Texas at San Antonio developed two experimental Z-shape models to utilize the temperature differences between the subgrade and road surface which facilitated the electricity generation by TEG. For the cooling process, two heat sinks, buried at underground and filled with water and soil, separately, were attached to TEGs (5). A more recent work, done by Jiang et al. in 2018, used rectangular aluminum vapor chambers to transfer captured heat to the TEGs. The other side of the TEG is exposed to a tank filled with water, and placed next to the pavement edge under a shading board (6).

## OBJECTIVE

In this study, the energy harvest system was developed by optimizing the heat transfer mechanism and proposing an innovative cooling technique. The objectives of this research are to:

- Determine the optimized design of harvester prototype using Finite Element (FE) analysis
- Conduct Field testing of a fabricated prototype to estimate power output.

## THEORETICAL BACKGROUND

A thermoelectric module is typically composed of n- and p-type legs, providing the ability for electrons to move freely through metals and semiconductors (7). Voltage value is given by the following equation (8):

$$V = \alpha(T_h - T_c) \quad (1)$$

where V is the voltage of the TEG,  $T_h$  is the hot side temperature of the TEG,  $T_c$  is the cold side temperature of the TEG, and  $\alpha$  is the Seebeck coefficient of the TEG.

In addition, the current, electrical power and the total amount of heat can be obtained using the following equations (8, 9):

$$I = V/(R + R_l) \quad (2)$$

$$P = Q_h - Q_c = I^2 R_l \quad (3)$$


$$Q = \alpha I T_c + K(T_h - T_c) - 1/2 I^2 R_L \quad (4)$$

where  $I$  is the current,  $R$  is the internal resistance of TEG,  $R_L$  is the Load resistance,  $(Q_h - Q_c)$  is the heat flux due to temperature gradient,  $Q$  is the total quantity of heat, and  $K$  is the heat transfer coefficient.

## MATERIALS AND METHODS

The assembled energy harvesting system is shown in Figure 1. As it can be seen, the system consisted of four segments such as the L-shape copper plate as heat collector and heat conductor, TEGs, heat sink, and insulation box. The L-shape copper plate with the thickness of 0.15 cm consisted of two segments; A Heat receiver with 50 cm length is embedded at 3 cm depth of pavement, A Heat conductor, the vertical segment, is placed near soil up to 18 cm depth (Figure 2). Two TEGs were used to convert the thermal energy into electrical power. The hot side of TEGs were attached to the copper plate with thermal paste and the cold sides connected to the heat sink. An aluminum heat sink with size of  $18 \times 10 \times 5$  cm was implemented for cooling purposes. A latent heat storage system using phase change material was used to fill this coolant system to store the thermal energy.

The Insulation Box was also designed as a thermal-barrier to prevent conducting heat to heat sink from ambient (Figure 4). In this way, the heat sink can perform ideally to provide a cooling effect, consequently leads to higher temperature difference within TEG. The insulation box consisted of three layers; the first layer exposed to ambient, is made of Polyvinylchloride; expanded Styrofoam with 2 cm thickness and was used as second layer; the third layer, which is in contact with heat sink, is Aerogel cover with 1 cm thickness.

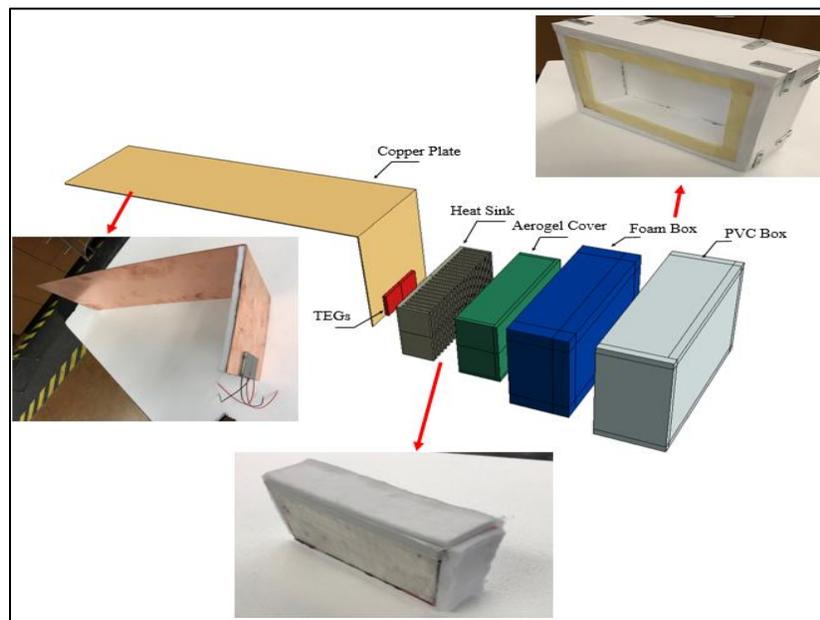

**Figure 1. The harvester prototype components**

The description and schematic of prototype is illustrated in Figure 2. The copper plate was embedded at 3 cm depth under pavement surface.

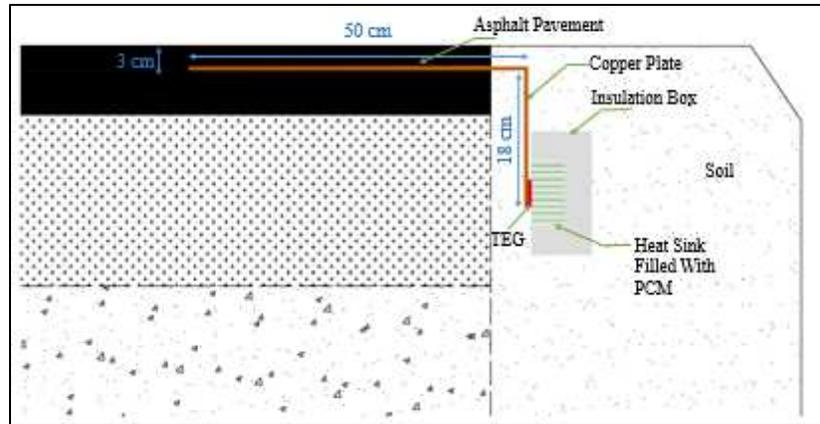


Figure 2. Schematic of the thermoelectric energy harvesting prototype in pavement

### FINITE ELEMENT MODEL

Finite element (FE) simulations were performed to determine the temperature distribution within the prototype. Simulating the prototypes is a proper approach to determine the optimum material and design shape for effective energy harvesting prototypes. The temperature variation at depths of 3, 15, 20 and 25 cm were measured in the field over five sunny days in San Antonio, TX (Figure 3). The measured temperatures were used for simulations.


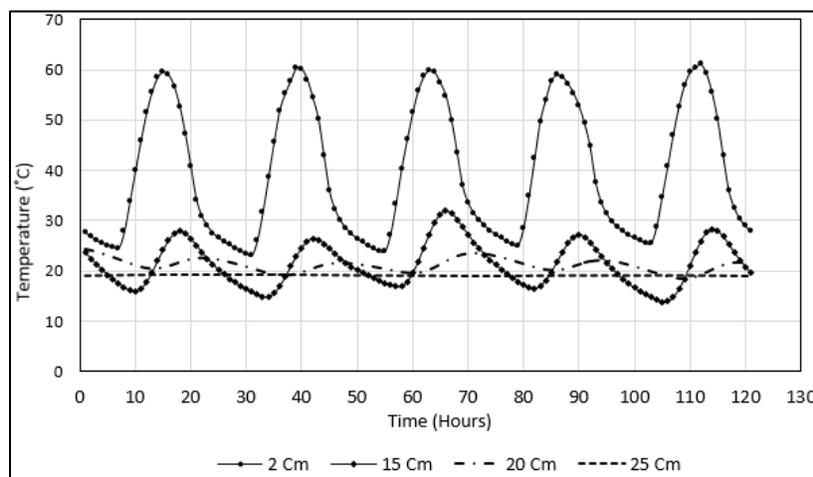



Figure 3. Temperature profile (four depths) for five days in San Antonio, TX

In order to find the proper material for the heat collector and conductor plate, three materials were selected and analyzed to determine which material could perform effectively to transfer thermal energy. Figure 4 represents the analysis of the prototypes with different materials (i.e., copper, Aluminum, and Steel). Based on the FE results, the copper plate could yield the temperature of 41 °C at bottom of vertical segment zone, which is the highest value among the models. Besides, the Aluminum and steel models revealed 37 and 24 °C, respectively. Therefore, it can be inferred that the copper plate would be more proper material for the proposed prototype.

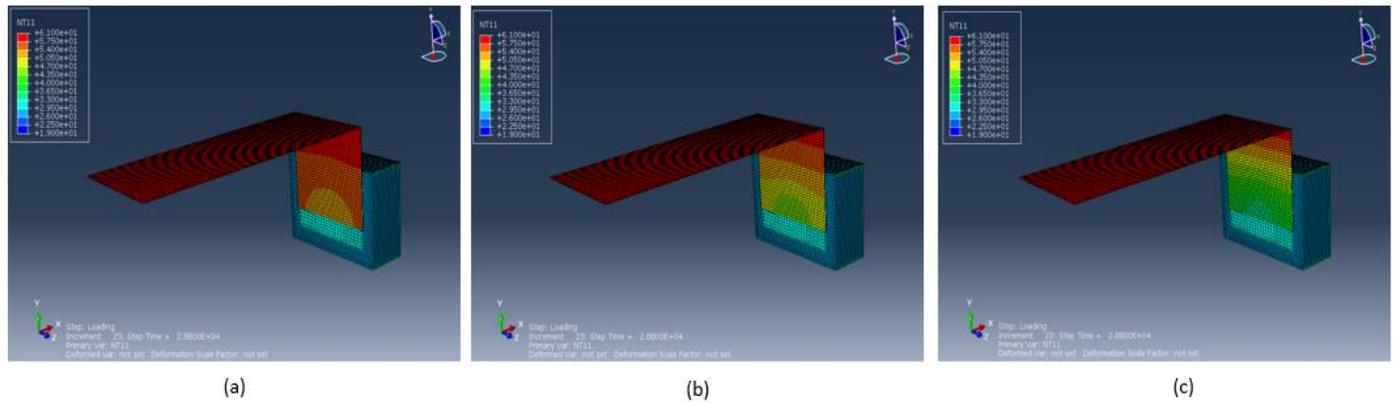

**Figure 4. FE modeling; (a) copper plate, (b) aluminum plate, (c) steel plate.**

In addition, two designs, L-shape and Z-shape, were evaluated to determine which shape would have better potential for transferring heat from asphalt pavement (Figure 6). FE analysis suggested that the L-shape design could be the optimum design for the prototype due to greater capacity to transfer the heat. Because, the Z-shape design revealed the temperature of 30 °C which is much lower than L-shape design (i.e., 41 °C).

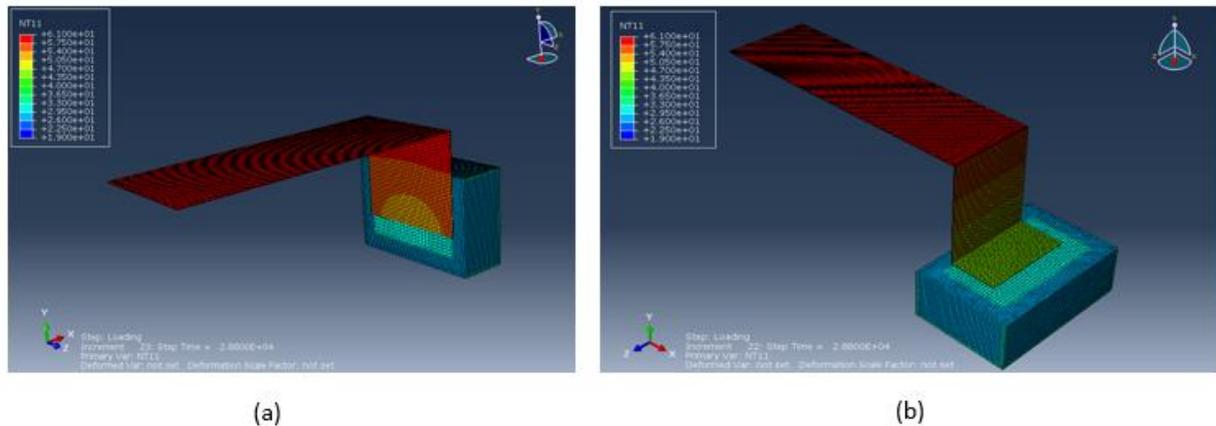

**Figure 5. FE modeling; (a) L-shape, (b) Z-shape.**


## EXPERIMENTAL RESULTS

A slab (Figure 6) was prepared with 60 mm thick HMA (dense graded hot mix asphalt typically used for surface) layer, with a copper plate embedded inside.



**Figure 6. Data Collection setup**

Figure 7 represents the output power for 8 h testing. The energy harvester system produced an average output power of 29 mWatt. As it can be seen, the system could generate 34 mWatt as the maximum power the maximum power between 2:00 pm and 2:30 pm. Additionally, the output power varies over the time by variation of the thermal gradient. The results showed that by decrease of thermal gradient, the rate of electric power generation dropped 25 %. Hence, a direct correlation between thermal gradient and power output can be found imping that the higher the thermal gradient, the more the energy can be harvested.

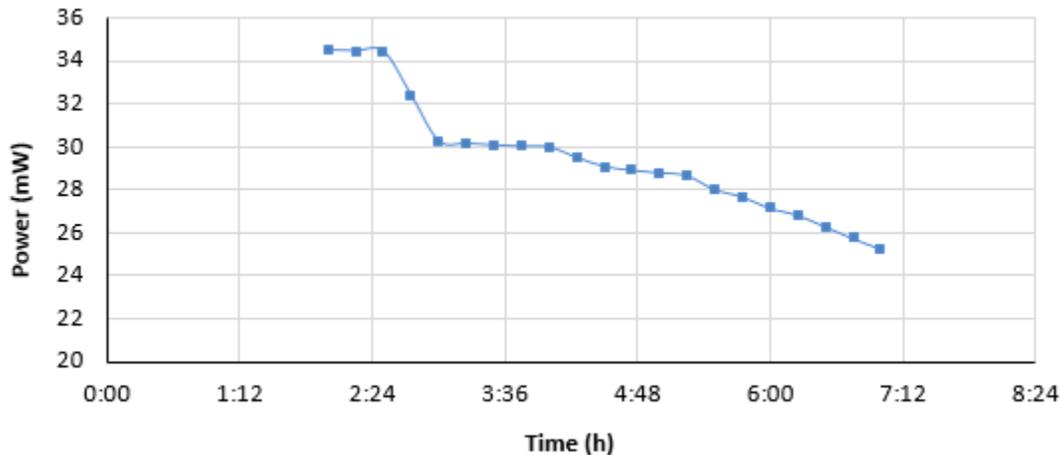

**Figure 7. Output power over 8 hours**

## CONCLUSION

In this study a road thermoelectric generator system was developed for electricity generation. From FE simulations and field test, the optimum design and the effectiveness of the system were evaluated. Based on the results, the followings findings are presented.

- Based on FE simulations, the L-shape plate showed the optimum design for heat transferring. In addition, the copper plate could have better performance for the prototype.
- The use of cooling module containing insulation Box, PCM and heat sink could be effective in maintaining the temperature of TEG cold side down.
- The results exhibited that there is direct relationship between thermal gradient and generated power, i.e. a higher temperature difference produced more electrical energy.
- Based on power measurements, the energy harvester system generated continuously an average power output of 29 mWatt per day.

## ACKNOWLEDGMENTS

The authors gratefully acknowledge the financial support from CPS Energy.

## REFERENCES

- [1] Bobes-Jesus V, Pascual-Muñoz P, Castro-Fresno D, Rodriguez-Hernandez J. Asphalt solar collectors: a literature review. *Applied Energy*, 2013.102:962-970.
- [2] Guo L, Lu Q. Potentials of piezoelectric and thermoelectric technologies for harvesting energy from pavements. *Renewable and Sustainable Energy Reviews*. 2017.72:761-773.
- [3] Chiarelli A, Dawson A, Garcia A. Analysis of the performance of an air-powered energy-harvesting pavement. *Transportation Research Record: Journal of the Transportation Research Board*. 2015. 2523: 156-163.
- [4] Wu G, Yu X. System design to harvest thermal energy across pavement structure. *IEEE Energytech*. 2012. 1-4.
- [5] Datta U, Dessouky S, Papagiannakis AT. Harvesting thermoelectric energy from asphalt pavements. *Transportation Research Record: Journal of the Transportation Research Board*. 2017.2628:12-22.
- [6] Jiang W, Xiao J, Yuan D, Lu H, Xu S, Huang Y. Design and experiment of thermoelectric asphalt pavements with power-generation and temperature-reduction functions. *Energy and Buildings*. 2018.169:39-47
- [7] LeBlanc S. Thermoelectric generators: Linking material properties and systems engineering for waste heat recovery applications. *Sustainable Materials and Technologies*. 2014. 1:26-35.
- [8] Lau PG, Buist RJ. Calculation of thermoelectric power generation performance using finite element analysis. *Proceedings ICT'97. 16th International Conference on Thermoelectrics*. 1997.
- [9] Liu C, Chen P, Li K. A 1 KW thermoelectric generator for low-temperature geothermal resources. *Proceedings, Thirty-Ninth Workshop on Geothermal Reservoir Engineering*. 2014. PP. 1-12.